




Waterproof Tape Black & Silver



UPDATED: 18.07.2012

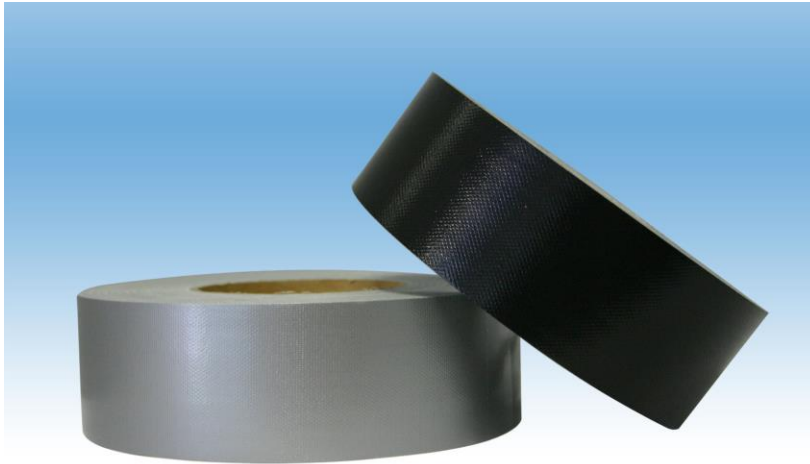

Part N°: 84592 Waterproof tape Black (5B2)
86144 Waterproof tape Silver (S5B2)

Features

- Good waterproof properties
- Excellent tensile strength, tack and adhesion properties
- Can be used at elevated temperatures
- Overpaintable
- Extra thick adhesive to provide excellent sealing bond to all types of surface

Benefits

- Will not fail when in contact with water
- Stays put
- Suitable for many applications
- Gives an OEM level of finish
- Prevents water ingress

Applications

Waterproof tape Black / Silver can be used for a wide variety of sealing and adhesive applications such as:

- Sealing heating & air conditioning duct connections, protecting electrical wiring & harnesses,
- Securing protective canvas and plastic coverings indoors and outdoors
- Holding components in place whilst adhesives cure.

Waterproof tape can also be used for quick temporary repairs of leaks in low pressure water and air lines, attaching signs to any surface, plus many other indoor and outdoor applications.

It is also useful for holding bonded windscreens in position while adhesive cures.

Industrial applications include securing multiple cables for electronic event equipment, securing as temporary solution application of window glasses, advertising boards, canvas covers etc

Instructions

1. Tear sufficient tape from the roll for repair to be conducted.
2. Apply to surface, ensuring tape is firmly pressed home.
3. To remove, lift edge and pull away from substrate



Hints & Tips

Once fitted this has sound deadening properties to reduce road noise.



Certificate No.1427/97



Certificate No.1427/97

Waterproof Tape Black & Silver



Technical Information

Size:	50mm x 50m roll	Thickness:	0.32mm
Product Colour:	Black / Silver	Adhesion on stainless panel:	:8.2 N/25mm typical
Consistency:	Solid	Ball tack No.	32 typical
Storage Life:	12 months	Tensile strength:	15kgf/25mm
Tariff Code:	5906 100 000	Holding power:	0.5mm/30 mins
Application temp:	-5 to 35 C	(Tests made at 23°C +/- 2°C, RH 50% +/- 5%)	
Operating temp:	-15 to 70 C	The following substances are excluded from the finished product: Cadmium (Cd), Lead (Pb), Mercury (Hg), Hexavalent chromium (Cr6+), Polybrominated biphenyl (PBB), Polybrominated Diphenylethers (PBDE)	
Hazard info:	Not applicable		
Adhesive:	Natural rubber base		
Substrate:	cotton/polyester cloth		
Backing:	LDPE coated cloth with release agents		

Associated Products: Acrysol, Surface cleaner, Soft Surface cleaner

Market Segments

Primary



Secondary



Health & Safety Information

This product is not subject to identification regulations under EC Directives and the Ordinance on Hazardous Materials.

Safety data sheet available for professional user on request.

In order to provide you with the most appropriate Personal Protective Equipment when using our products, KENT advises that you follow the guidelines on the packaging of the product before use. The guidelines are there for your protection and KENT provides a range of Personal Protection Equipment such as clothing, eye glasses, goggles, face shields and breathing apparatus, complying with the latest European legislation. If you require further advice then please phone our freephone number and we will be pleased to help you. Telephone: 0800 136925

Terms and Conditions

No part of this publication may be reproduced, transmitted or stored, electronically, mechanically or photocopied without the prior permission of KENT UK.

This data sheet and its contents (the "Information") belong to KENT UK or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted.

The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the business assumes no responsibility for its accuracy or completeness, any error from or omission in it nor for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including

liability resulting from negligence or where the business was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the business liability for death or personal injury resulting from its negligence.

Registered Office: Amber House, Showground Road, Bridgwater, Somerset, United Kingdom TA6 6AJ

All rights reserved

KENT UK, Pitreavie Crescent, Pitreavie Business Park, Dunfermline, Fife KY11 8UQ

Tel : Freephone 0800 136925 or 01383 737393 between 08:30-17:30 Monday-Thursday,

09:00-15:00 on Fridays'. For out of hours queries please Fax us on 01383 735829 or

Email: KENTsales.UK@kenturope.com

DS99